

See also: II/Chromatography: Liquid: Detectors: Mass Spectrometry; Detectors: Ultraviolet and Visible Detection; Nuclear Magnetic Resonance Detectors. **Extraction:** Solid-Phase Extraction; Solvent Based Separation; Ultrasound Extractions. III/Solid Phase Extraction with Cartridges.

Further Reading

- Berberich DW, Yost RA and Fetterolf DD (1988) Analysis of explosives by liquid chromatography/thermospray/mass spectrometry. *Journal of Forensic Science* 33: 946.
- Bratin K, Kissinger PT, Briner RC and Bruntlett CS (1981) Determination of nitro aromatic, nitramine and nitrate ester explosive compounds in explosive mixtures and gunshot residue by liquid chromatography and reductive electrochemical detection. *Analytical Chimica Acta* 130: 295.
- Fedoroff BT (ed.) (1960–83) *Encyclopedia of Explosives and Related Items*, vols 1–10. Dover: Picatinny Arsenal.
- Hubball J (1992) The use of chromatography in forensic science. *Advances in Chromatography* 32: 154–172.
- Jenkins TF, Leggett DC, Grant CL and Bauer CF (1986) Reverse-phase high-performance liquid chromatographic determination of nitroorganics in munitions wastewater. *Analytical Chemistry* 58: 170.
- Levsen K, Preiss A and Feltes J (1995) Analysenmethoden für Explosivstoffe. In: Rippen G (ed.) *Handbuch der Umweltchemikalien* vol. 3, 31st edn, pp. 36–75. Landsberg: Ecomod.
- Lewin U, Wennrich L, Efer J and Engewald W (1997) Determination of highly polar compounds in water samples around former ammunition plants. *Chromatographia* 45: 91.
- Lloyd JBF (1992) HPLC of explosive materials. *Advances in Chromatography* 32: 173–261.
- US Environmental Protection Agency (1992) *Method 8330, revision 1*. Washington, DC: EPA.
- Yinon J and Zitrin S (1993) *Modern Methods and Applications in Analysis of Explosives*. New York: Wiley.

Thin-Layer (Planar) Chromatography

J. Bladdek, Military University of Technology, Warsaw, Poland

Copyright © 2000 Academic Press

Introduction

The term explosive has two meanings. It is used for individual chemical compounds among which trinitrotoluene (TNT), 1,3,4-trinitro-1,3,5-triazacyclohexane (hexogen-RDX), 1,3,5,7-tetranitro-1,3,5,7-tetrazacyclooctane (octagen-HMX), pentaerythritol tetranitrate (pentrik-PETN) nitroglycerine (NG) and nitrocellulose (NC) are commonly known. This term is also used for mixtures of the above individual compounds and their mixtures with other, non-explosive substances; the type and amount of components in a mixture determines its properties (brisance, melting, plasticity and the like). Explosives have been classified in many ways according to different criteria. Most important is the kind of addition, the NO₂ group and type, and the velocity of the reaction involved. The first are divided into the following groups; nitro compounds containing the C-NO₂ group, nitrate esters with C-O-NO₂ group and nitramines with C-N-NO₂ group. The second criterion divides explosives into high and low explosives (HEs and LEs respectively).

The identification and quantification of the HEs or LEs are very valid and also present difficult analytical problems. These problems become evident especially

during: (i) testing of environmental pollutants, (ii) forensic investigations, and (iii) checking technological processes and service conditions of munitions manufacture. From an analytical point of view, at least three groups of TLC applications in explosive investigations can be distinguished. The first of them, most often represented in the research literature, concerns qualitative (including screening methods) and quantitative analysis of explosives. The second is where TLC is applied as a clean-up technique. In this case analysis is completed by other analytical techniques. The last group of applications mainly covers the evaluation of LE stability.

Although, recently, more sophisticated methods such as thermal analyses and gas or liquid chromatography are commonly used in many laboratories, TLC is still in use. Starting from paper chromatography and improved over many years, TLC has become very effective in the analysis of explosives. Apart from high performance adsorbents, and the ability to perform separations in both normal and reversed-phase systems, the real advances are due to the development of densitometry and the spray-on technique of sampling.

Analyses of Explosives

Early TLC analysis was performed on home-made chromatographic plates and involved the separation of classical HEs such as TNT, RDX,

Table 1 Examples of TLC separation of explosives

Analyses	Chromatographic system		Type of elution
	Stationary phase	Moblie phase	
TNT, RDX, PETN, tetryl, NC, NG	Silica gel	Trichloroethylene–acetone (4 : 1)	One-dimensional, isocratic
TNT, RDX, HMX, PETN, tetryl	Silica gel HPTLC F ₂₅₄	Carbon tetrachloride–aceto-nitrile (8 : 1)	One-dimensional, isocratic
HMX, RDX, 2,4-DNT, TNT, NG, PETN, tetryl	Silica gel HPTLC F ₂₅₄	I petrol ether – acetone (3 : 1) II petrol ether – ethyl acetate (8 : 1)	Two-dimensional, isocratic
Trinitrobenzene, 2,4-DNT, TNT tetryl, NG, PETN, RDX	Silica gel HPTLC F ₂₅₄	Benzene - petrol ether–methanol (8 : 6 : 1)	One-dimensional, isocratic
TNT m-dinitrobenzene, trinitrobenzene, tetryl, 2,4-dinitrochlorobenzene, picramide, heksyl	Silica gel G-magnesium silicate (1 : 1)	Xylene	One-dimensional, isocratic
2,3,4-TNT, 2,4,6-TNT: 1,2-DNB: RDX	Silica gel HF ₂₅₄	Benzene–hexane–pentane (5 : 4 : 1)	One-dimensional, isocratic
RDX, HMX, tetryl, PETN, TNT, 2,4-DNT, 2,6-DNT	Silica gel with chemical bonded octadecyl, RP-C-18		AMD, gradient elution
Hexyl, picric acid, RDX, HMX, 2,4,6-N-tetranitro-N-methyl-aniline, 2,4- and 2,6-dinitrotoluenes, TNT, 1,3-dinitrobenzene, 2-amino-4,6-dinitrotoluene, 4-amino-2,6-dinitrotoluene	Silica gel HPTLC		AMD, gradient elution

HMX and PETN (see Yinon and Zitrin in Further Reading).

One-dimensional ascending or horizontal techniques have usually been applied for the development of chromatograms in a closed chamber (Table 1). Multiple and two-dimensional development techniques have seldom been used but automated multiple development (AMD) and gradient development are becoming more frequently used.

In TLC much attention is paid to the methods of analyte visualization, especially to search for specific reactions which can confirm the presence of an analyte in a spot or band. Confirmation of the identity of an analyte is thus based on at least two criteria,

R_F and colour reaction. The majority of more or less specific explosive visualization schemes have been worked out long ago (Table 2). Exhaustive reviews of those methods can be found in the publication by Yinon and Zitrin, mentioned above, and in York *et al.* (see Further Reading).

Most investigations on the analysis of explosives by TLC have been confined to environmental protection. In such research, classical TLC has been applied mainly as a screening method and has served to provide essentially qualitative analysis; instrumental TLC provides both qualitative (screening) and quantitative determination. Environmental analysis of explosives is justified by the fact that nitrotoluenes and

Table 2 Examples of visualization of explosives

Visualization method	Analyte	Quantification	
		Yes	No
UV absorption	2,3,4-TNT, 2,4,6-TNT, 1,2-DNB, RDX	x	
NaOH in methanol acetone (1 : 1)	Nitroaromatic compounds		x
π complex formation with <i>o</i> -toluidine, N,N-dimethyl-aniline, m-chloroaniline or anthracene	m-DNB, TNB, TNT, tetryl, 2,4-dinitrochlorobenzene, picramide, heksyl		x
Griess reagent	RDX, HMX	x	
UV followed by 5% DPA in methanol acidified by H ₂ SO ₄	RDX and nitrates		x
5% DPA in methanol	Nitroaromatic compounds		x
NaOH/ Griess reagent	NG, NC	x	
0.2% Würster's salt in methanol	NC, NG, PETN		x

especially trinitrotoluenes are highly toxic compounds. The aromatic amines formed by their biodegradation are suspected to be carcinogenic. Due to careless handling during the manufacture, loading, and packing etc., of explosives, groundwater, surface water and soil may be contaminated with these compounds. Occasional plant accidents, and residues from World War II are also sources of pollution.

Screening methods, which most often use colorimetric visualization reactions, serve to lower the cost and are less time-consuming for the analysis of a large number of samples. An excellent example which illustrates the advantages of TLC for such applications is provided by Haas and Stork. The most interesting information in this work lies in the method of sample preparation (liquid-liquid extraction) and the technique of separation of large numbers of analytes. Water samples taken from waste-heaps, containing post-production residues of TNT, were extracted with isopropyl ether under a range of pHs. At pH 4 aromatic amines were retained in the aqueous phase and phenols and nitro compounds were extracted into the organic phase (ether extract A). To enable extraction of amines into the organic phase, the pH was adjusted to 8 (ether extract B). Phenols were isolated from extract A by treating with 1M NaOH (nitrotoluenes remained in the extract). The aqueous phase, of extract A was then re-adjusted to pH 4 and re-extracted to transfer phenols to the organic phase (extract C). After drying and concentration, the three extracts are analysed by normal phase chromatography using two-dimensional isocratic elution. Analytes are identified by the quenching of fluorescence or by colour reactions. In extract A (nitrotoluenes) 25 compounds were found and 2,4-, 2,6-dinitrotoluene and TNT were identified. In extract B (nitroamines) 26 compounds were found. In extract C, containing phenols, 28 compounds were found and 2,4-dinitro-6-methylphenol and 2,6-dinitro-4-methylphenol were identified. Confirmation of TLC results and quantification were performed using spectrophotometry and gas chromatography.

On-site TLC screening methods for explosives in soil have been reviewed by Nam who suggested that the results obtained using two colorimetric-based methods (TNT and RDX-methods), commonly used for on-site analysis of explosives in the USA, are not perfect. The first of the methods, is based on the reaction of an acetone soil extract of TNT with base, to produce reddish coloured Jankowsky ions. For the RDX method, the soil extract is first acidified and reacted with zinc to reduce the RDX to nitrous acid; the solution obtained is reacted with Griess reagent to produce a reddish coloured azo dye. Unfortunately,

these are not specific reactions and require other techniques for confirmation. The work describes the separation techniques for nitroaromatics, nitroamines and nitrate esters, classical, colour visualization methods and also the costs of analysis. Laboratory analytical methods for the most commonly found components of explosives, and environmental transformation of these substances in a soil matrix, have been developed in the work of Jenkins *et al.*

More recently gradient automated multiple development (AMD) HPTLC using a normal phase system has been applied to the determination of explosives and their biodegradation products in contaminated soil and water. The subjects of examination were hexyl, picric acid, RDX, HMX, 2,4,6-N-tetranitro-N-methylaniline, 2,4- and 2,6-dinitrotoluenes, TNT, and other by-products such as 1,3-dinitrobenzene, 2-amino-4,6-dinitrotoluene, and 4-amino-2,6-dinitrotoluene found in former ammunition site waste in Germany. The use of optimized gradient elution and an AMD system allowed the separation of analytes from environmental samples and quantification at the 5–20 ng level; humic substances presented in water samples do not interfere. In the case of samples of soil with a high concentration of humic substances, a clean-up technique is necessary. The superiority of TLC is displayed by the fact that similar analyses using GC or HPLC require (even for water samples) very careful sample clean-up or the application of size exclusion chromatography.

Modern TLC equipment has also been applied to the quantitative determination of HE residues in soil and water using a reversed-phase system with automated multiple development gradient elution after liquid-liquid and solid-phase extraction. Quantification was carried out by UV or visible absorption light measurement *in situ*. The work demonstrated that the application of AMD was effective for the isolation and separation of relative complex HE mixtures in one analytical process (Figure 1). Most of the examined HEs absorb UV light, which allows their quantification by densitometry (Table 3).

During the measurement of PETN, Wurster's salts were applied (organic nitrate esters oxidize Wurster's salts yielding the so-called 'Wurster's cations' which are intensely coloured). It has been proved that this reaction can also be used for quantitative analysis. The extraction of HEs from water samples, using solid-phase extraction (SPE) cartridges filled with SDB-1 phase (recoveries $\approx 90\%$), was shown to be more effective than liquid-liquid extraction. Slightly lower values of recoveries during extraction from soil (77.0–84.4%) were obtained but these result from the more complex procedure for their preparation for analysis (necessity of purification).

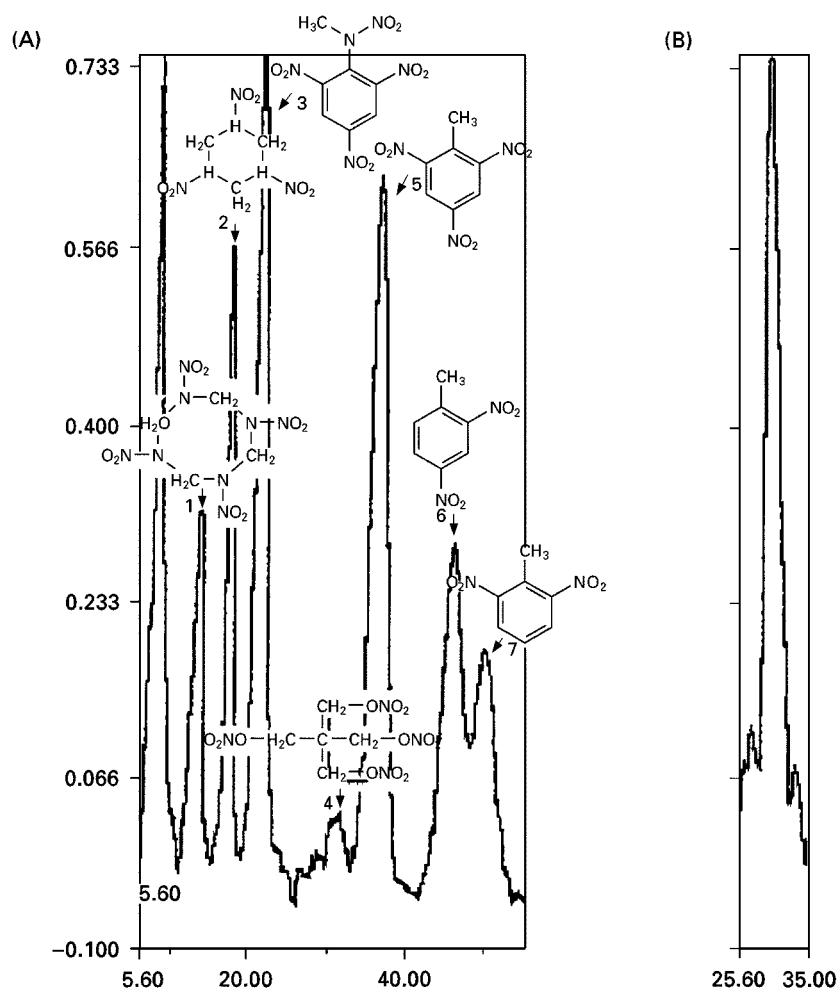


Figure 1 Chromatogram of high explosives: 1 = octagen, 2 = hexogen, 3 = tetryl, 4 = pentrit, 5 = trotyl, 6 = 2,4-DNT, 7 = 2,6-DNT: (A) scanning at wavelength 220 nm, (B) pentrit, scanning at 600 nm. Abscissa – absorbance, ordinate – range of the spots in mm. (Reproduced with permission from Bładek J *et al.* 1998.)

The proposed technique for the elimination of the majority of non-polar impurities from soil extracts using SPE is very effective for the identification and quantification of the analytes examined (Figure 2).

Post-blast analyses, or identification of explosive residues in forensic investigations, are directly associated with combat, and criminal or terrorist activity. Results of such analyses may give information about the type, and sometimes also about the source of

Table 3 Parameters of quantification

High explosive	λ_{max} nm	Calibration curve			Detection limits, ng
		$A \cdot 10^{-3} =$	Correlation coefficient	Max, range of linearity, ng	
Octagen	215	$8.8c - 0.1$	0.9861	1600	200
Hexogen	220	$10.7c + 0.6$	0.9858	1600	200
Tetryl	220	$28.5c + 3.1$	0.9989	1000	50
Pentrit	600	$30.9c + 0.3$	0.9899	1600	200
TNT	220	$12.5c + 50.5c - 0.6$	0.9989	-	50
2,4-DNT	240	$29.7c - 1.0$	0.9378	1000	100
2,6-DNT	220	$10.7c - 0.7$	0.9728	2000	200

*A, densitometric peak area; c, amount of the pesticide in the band.

(Reproduced with permission from Bładek J *et al.* 1998.)

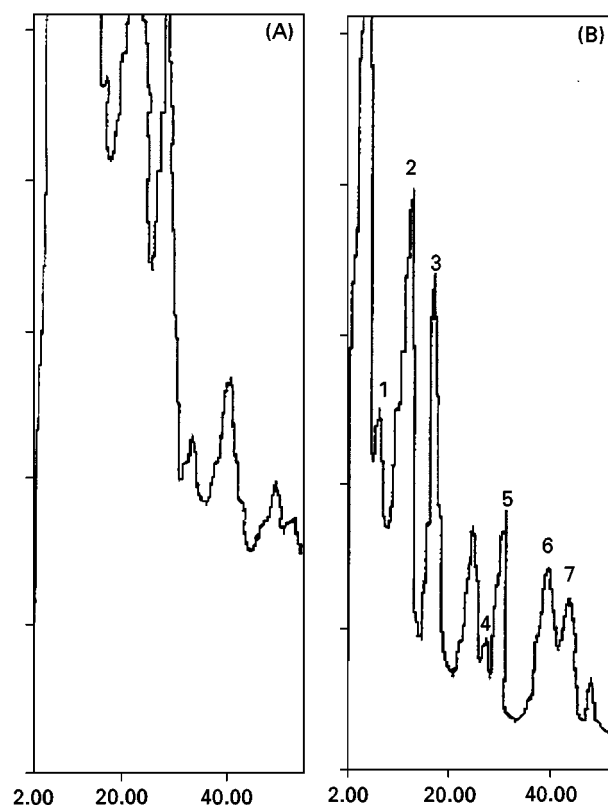


Figure 2 Chromatograms of soil sample: (A) before purification, (B) after purification by SPE. Notation as in Figure 1. (Reproduced with permission from Bładek J *et al.* 1998.)

explosives or about possible contact with explosives. From an analytical point of view, these methods are similar to investigations of explosives in environmental matrices; the difference concerns isolation from the matrix (debris, bodies and surfaces). These matrices are usually extracted in two ways: by water and by organic solvent. The water extract is then analysed for inorganic ions and the organic extract for the explosives. Yinon and Zitrin have described the complexity of such analysis (see Further Reading).

TLC as a Clean-up Method

Forensic and environmental analyses are usually performed in several stages, one of the most important being sample preparation. This stage covers the isolation, concentration, and purification of analytes for further analysis. Three basic methods of purification of analytes may be distinguished: liquid–liquid extraction, solid-phase extraction and preparative thin layer chromatography. For preparative TLC, the analytes are spotted as a long band on the start line. After developing chromatograms the plates are dried, and cut, if plastic or aluminium, or scored, if glass, so that they contain the standard lanes and part of the sample. Classic, preparative TLC has been rarely used for the purification of explosives. Easy access and a variety of stationary phases for SPE make it more useful than preparative TLC in this application.

Table 4 Examples of TLC separation and visualization of stabilizers

Stabilizer	Chromatographic system		Type of elution	Visualization
	Stationary phase	Mobile phase		
DPA and its derivatives	Silica gel HPTLC	1 step: petrol ether–benzene (1 : 1) 2 step: benzene 1 dimension: benzene-1,2-dichloroethane– carbon tetrachloride (10 : 5 : 6)	One-dimensional, two-steps, isocratic	UV or VIS absorption
DPA and its derivatives	Silica gel	2 dimension: ethyl acetate–petrol ether (2 : 8)	Two-dimensional, isocratic	UV or VIS absorption
EC and its derivatives	Silica gel	1 dimension: benzene 2 dimension: benzene–diisopropyl ether (3 : 1)	Two-dimensional, isocratic	UV or VIS absorption
DPA and its derivatives	Silica gel with zinc powder	1 dimension: petrol ether–benzene– acetone (99 : 99 : 2) 2 dimension: petrol ether–ethyl acetate (4 : 1)	Two-dimensional, isocratic	0.25% ethanol solution of <i>p</i> -diethylaminebenzaldehyde in 0.25 M HCl
EC and its derivatives	Silica gel with zinc powder	1 dimension: 1,2-dichloroethane 2 dimension: petrol ether–ethyl acetate (4 : 1)	Two-dimensional, isocratic	EC: 0.003% dichlorofluoresceine in ethanol followed by UV; derivatives: 0.25% ethanol solution of <i>p</i> -diethylaminebenzaldehyde in 0.25 M HCl

TLC in Research

This work mainly concerns LEs (propellants). Nitrate ester-based propellant compositions decompose under normal storage conditions producing nitrogen dioxide as a primary decomposition product. This NO_2 is the source of further, autocatalytic decomposition of propellants, limiting their safe storage life. In order to reduce the rate of deterioration of propellants, stabilizers (usually diphenylamine – DPA) or centralite I-(N,N'-diethyl-N,N'-diphenylurea) –EC, which react with the primary decomposition products, are usually incorporated, to inhibit degradation. The amount of stabilizers added varies, but is typically less than 1% (in the case of DPA) and 3% (in the case of centralite). The stabilizers react with nitrogen oxides forming different degradation products and whilst some of these products also act as stabi-

lizers others contribute to stabilizer depletion. Examples of the application of TLC to stabilizer measurement are presented in Table 4.

One example of the application of TLC for propellant stability research uses three chromatographic systems for the isolation of stabilizers (Figure 3) from single-base, free emulsion double base and emulsion propellants (Table 5). Samples are divided into 2 parts. One is heated for 1 h at 120°C in an open vessel and the other left unheated. All samples are then dissolved in acetone (this procedure is more effective than the extraction of stabilizers) and analysed to observe the differences between the state of chemical change of the stabilizer and its reaction products before and after ageing. Analyses are performed using a liquid-crystal detector, and confirmation was done using densitometry.

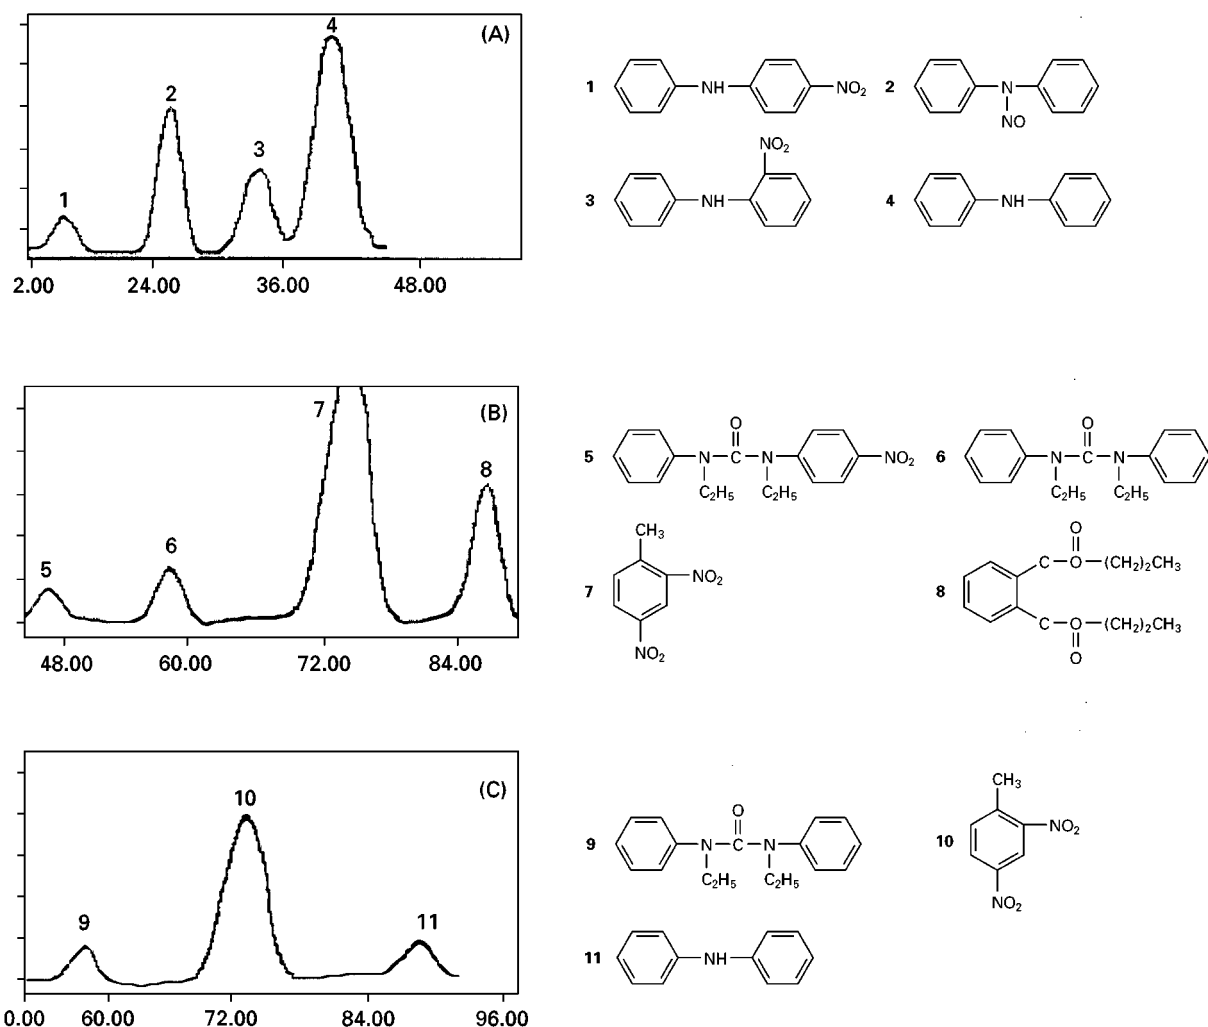


Figure 3 Fragments of propellant chromatograms: (A) single-base, (B) double base, (C) emulsion propellant. Abscissa – absorbance, ordinate – range of the spots in mm. Peaks notation: 1 = 4-nitrodiphenylamine, 2 = N-NO-diphenylamine, 3 = 2-nitrodiphenylamine, 4 = diphenylamine, 5 = 4-nitro centralite, 6 = centralite, 7 = 2, 4-dinitrotoluene, 8 = dibutylphthalate, (c) 9 = centralite, 10 = 2,4-dinitrotoluene, 11 = diphenylamine. (Reproduced with permission from Bładek J *et al.* 1993.)

Table 5 Characteristic compositions of propellant samples

Propellant	Concentration [%]						
	NC	EC	NG	DPA	DNT	DBP	Others
Single-base	96–99		0.7–2.0				0.0–1.8
Emulsion-free double-base	56–66	20–45		0.7–3.0	7–12	0.0–5.0	0.0–1.5
Emulsion	56–70	10–20	0.5–1.0	3–4	10–15		0.0–1.5

(Reproduced with permission from Błażek J *et al.* 1993.)

In three lots of single-base propellants, stored for 48, 47 and 41 years consumption of DPA in the range 75–100% was determined (before heating). The main products of chemical change are N-NO-DPA, 4-NO₂-DPA, 2-NO₂-DPA and also traces of dinitro-DPA. The most often observed differences in the concentrations of DPA before and after heating were in the range 0.2–0.6% (m/m). In most stable double-base propellants during storage of up to 50 years, a small decrease of 5–10% EC content was observed. Rarely, traces of 4-NO₂-EC were found. This work also found that in some unstable double-base propellants (stored for 40 years) and mortar propellants (stored for 38 and 23 years), 90–100% of the EC had changed into its reaction products mostly into mono-nitro-EC. Studying chemical changes of EC stable propellants before and after heating, there were determined differences in EC concentrations in the range 0.2–0.8% (m/m). As in single-base propellants, the dynamics of stabilizer changes in double-base propellants, both under natural and accelerated ageing varies up to ten times under the same conditions of ageing. It means, that the quality, especially of basic components of the propellants, has greater influence on their decomposition than the 'age'. The use of TLC methods to determine the stabilizers and their reaction products in the propellants seems to be suitable and reliable.

Conclusions

There are a large set of analytical needs connected with the analysis of explosives. The importance of this problem can be appreciated by looking at the statistics on recent bombings in the world. Besides the tasks mentioned above, there is a need for vehicles or mail screening, bomb search, protection of special infrastructure features, and so on. Of course, not all analysis can be performed using TLC.

In the history of TLC for analysis of explosives the 1960s and 1970s was a time of very intensive use. The development of modern analytical methods has caused a decrease in interest in TLC. An increase of interest in TLC, as applied to the analysis of explosives,

can be observed in the 1990s and is connected with the intensive development of the method.

TLC, like all other chromatographic techniques, is a comparative method. It is impossible to obtain information about the structure or identification of unknown compounds or mixtures. In such cases there exists the possibility of combining TLC with other, mainly spectroscopic, analytical techniques (e.g. TLC-MS). Such combinations will probably start widening the application of TLC in the analysis of explosives.

See also: II/Chromatography: Thin-layer (Planar): Densitometry and Image Analysis; Instrumentation; Layers; Mass Spectrometry; Modes of Development: Conventional; Preparative Thin-layer (Planar) Chromatography; Spray Reagents; **Extraction:** Solvent Based Separation; Solid-Phase Extraction. III/Explosives: Gas Chromatography; Liquid Chromatography. **Humic Substances:** Liquid Chromatography.

Further Reading

- Błażek J, Miszczak M and Śliwakowski M (1993) Application of liquid-crystalline detectors to the quantitation of propellant's stabilizers by thin layer chromatography. *Chemical Analysis*, 38: 339.
- Błażek J, Papliński A, Neffe S, and Rostkowski A (1998) Application of TLC for Determination of High Explosive Residues in Water and Soil Samples. *Chemical Analysis*, 43:711.
- Crockett AB, Jenkins TF, Craig HD and Sisk WE (1998) *Overview of On-Site Analytical Methods for Explosives in Soil*. US Army Corps of Engineers. Cold Regions Research and Engineering Laboratory. Special Report 98: 4.
- Hass R and Stork G (1989) Konzept zur Untersuchung von Rüstungsaltslasten. 1. Untersuchung chemaliger TNT-Fabriken und Füllstellen. *Fresenius Z. Analytical Chemistry* 335: 839.
- Kirchner JG (1978) *Thin Layer Chromatography*. Chichester: John Wiley & Sons.
- Nam SI (1997) *On-Site Analysis of Explosives in Soil: Evaluation of Thin Layer Chromatography for Confirmation of Analyte Identity*. US Army Corps of Engineers. Cold Regions Research and Engineering Laboratory. Special Report 97: 21.

- Steuckart C, Berger-Preiss E and Levsen K (1994) Determination of explosives and their biodegradation products in contaminated soil and water from former ammunition plants by automated multiple development high-performance thin-layer chromatography. *Analytical Chemistry* 66: 2570.
- Yinon J and Zitrin S (1981). *The Analysis of Explosives*. Oxford: Pergamon Press.
- Yinon J and Zitrin S (1993). *Modern Methods and Applications in Analysis of Explosives*. Chichester: John Wiley & Sons.
- York H, Funk W, Fischer W and Wimmer H (1994) *Thin Layer Chromatography: Reagents and Detection Methods – Physical and Chemical Detection Methods: Fundamentals. Reagent 1*. Volume 1a. Weinheim: VCH.
- York H, Funk W, Fischer W and Wimmer H (1994) *Thin Layer Chromatography: Reagents and Detection Methods – Physical and Chemical Detection Methods: Activation Reactions, Reagent Sequences, Reagents II*. Volume 1b. Weinheim: VCH.

EXTRACTION: PRESSURIZED FLUID EXTRACTION

See **III / ENVIRONMENTAL APPLICATIONS: Pressurized Fluid Extraction;**
PRESSURIZED FLUID EXTRACTION: NON-ENVIRONMENTAL APPLICATIONS

FATS



Crystallization

K. Sato, Hiroshima University, Higashi-Hiroshima, Japan

Copyright © 2000 Academic Press

Introduction

Fats, as mostly represented by triacylglycerols, are employed in foods, cosmetics, pharmaceuticals, etc. as the main bodies of end products, or as the matrices in which fine chemicals are dispersed. The crystallization behaviour of fats has two major industrial implications: (a) processing of the end products made of fat crystals, such as chocolate, margarine and shortening, whipping cream, etc. and (b) separation of specific fats and lipids materials from natural resources, mostly from vegetable or animal fats and oils, which contain various molecular species having different chemical and physical properties. As for the separation technology of crude fat resources, such as palm oil, milk fats, hydrogenated vegetable oils, etc. it may be worth noting that current market demands raise a great necessity to develop the fractionation of high-melting and low-melting fats and lipids through dry fractionation. The main causes for this are the replacement of hydrogenation by dry fractionation, a new regulation of usage of fat materials for confectionery fats, better functionality of physically refined

vegetable oils compared to conventional materials, etc. This review highlights the basic information on recent research on the crystallization of fats, with a specific emphasis on the separation phenomena.

The specific characteristics of the crystallization of fats are, on the one hand, polymorphism, and molecular interactions on the other. No long-chain compound without polymorphic modifications is present, and this property is more enhanced in triacylglycerol (TAG) crystals. The molecular interactions in TAG crystals are operative mostly through van der Waals forces between hydrophobic aliphatic chains, in which geometrical and steric hindrance is critical between the glycerol groups.

Polymorphism in Fats

Polymorphism is defined as the ability for a chemical compound to form different crystalline or mesophase (liquid crystalline) structures. The melting and crystallization behaviour differs from one polymorph to others, since the different crystal structures correspond to different Gibbs energies.

Polymorphic crystallization is primarily determined by the rate of nucleation, as determined by thermodynamic and kinetic factors. If the first crystallizing form is less stable, it converts to more stable polymorphs through the solid matrix or liquid mediation. As a consequence, morphology of fat crystals is a function of the crystal structure itself, and the thermal processes of the crystallization and sub-